

AIRDOME • SET UP INSTRUCTIONS

AirDOME
BY INSTENT



INSTRUCTIONAL CONTENTS

- A. Cleaning & Care
- B. Setting Up Your AirDome
- C. Setting up your Awning
- C. Setting up your Banner
- D. Securing your AirDome

A. CLEANING & CARE

- Do not over-inflate your AirDome: no more than 3psi and/or ALWAYS gage it by pressing in with your finger approx. 1/8 of an inch.
- Always try to use on a flat, free of debris surface & add a tarp to cover the ground.
- Do not pinch, trap or walk on the tubes, when punctured the inner bladder must be repaired, or replaced.
- Always secure your AirDome using the recommended manufacturer weights or stakes.
- Wash with clean, mild & soapy water (avoid using corrosive substances).

SAFETY



- Do not use in extreme weather conditions (heavy rains, storms, hail storms, extreme temperatures).

- Be careful with sharp objects which may damage the structure (metal wires, glass, tree branches, etc.)




For More Information & Instructional Videos Visit Our Website at Instent.com/support

B. SETTING UP YOUR AIRDOME



Step 1

Roll out your AirDome frame flat on a clean surface to make the shape of an X.

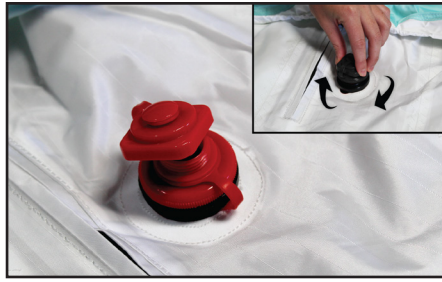

Step 2

Tighten all the black valves. Then tighten the bottom red valve & leave the top layer open.

NOTE: The **BLACK** valves are only for releasing air pressure. The **RED** Valve is the only one that you will use to inflate.



Step 3

Begin inflating your AirDome through the RED Valve.




Step 4

Once you have inflated 3 legs, you can lift your AirDome & continue to inflate until the legs are firm.




Before proceeding, verify that you have the following items:

- Awning fabric
- 3 sets of fiberglass ribs

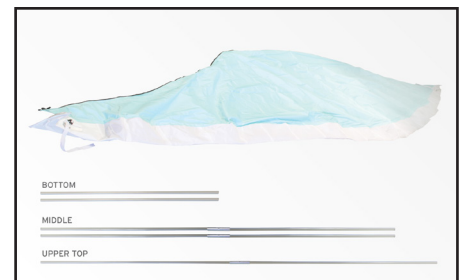

Step 1

Begin by unfolding the awning hardware & base.

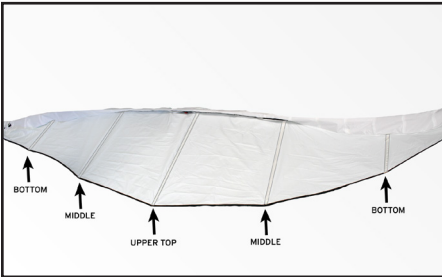

Step 2

Before you begin verify where the ribs should be inserted.

NOTE: When done using your Awning, make sure to keep the fiberglass ribs in their correct storage order.



Step 3

Insert the ribs through the base openings of the Awning fabric in their respective order.



Step 3


Once you're done securing the ribs onto the Awning fabric, begin to inflate the tube.

NOTE: There is no pressure valve so be careful not to over-inflate.



Step 4

Once inflated, locate the correct zipper track & begin to zip your Awning top onto your AirDome top.

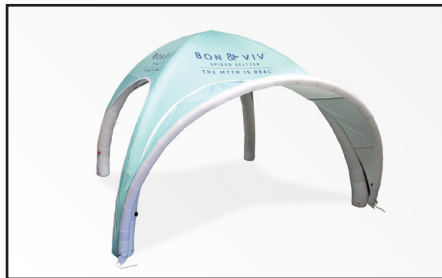


You're all set!

D. BANNER SET UP INSTRUCTIONS



Before proceeding, verify that you have the following item:

- Awning Banner

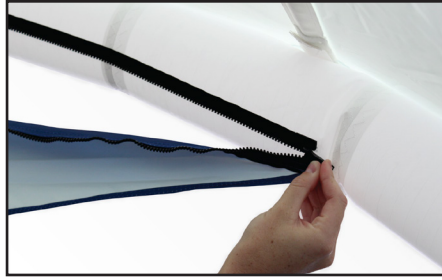

Step 1
With your AirDome Banner, locate the zipper track & begin to zip your Banner onto your AirDome Awning.



You're all set!

E. SECURING YOUR AIRDOME



Before proceeding, verify that you have the following item:

- Rubber Weight
- Weight Strap with clip




Step 1
Carefully place your 30lb rubber weight under the AirDome leg.



Step 2
Take the loop end of the weight strap & insert it through the opening of the rubber weight.



Step 3
Next, take the clip end of the strap & insert it through the loop end of the weight strap. Pull the clip through to tighten around the rubber weight.

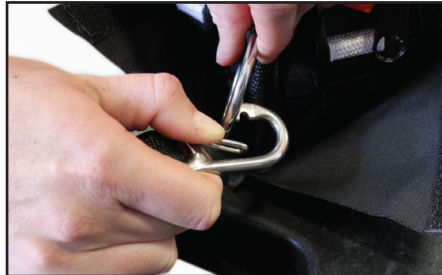

Step 4
Take the clip end of the weight strap & secure to the center metal loop of the AirDome Leg.



You're all set!
The end product should look like this.



For More Information & Instructional Videos Visit Our Website at [Instent.com/support](https://instent.com/support)