


# General Set Up Instructions *\*Set up one frame at a time to avoid mixing pieces*



1  
Straighten and connect all bungeed poles.



2  
Organize all remaining poles by their numerical order & connect accordingly. **Insert any remaining reinforcement poles.**



3  
Lift the frame and connect the footplates onto the frame.




4  
Put on your fabric gloves and slide the printed graphic over the frame.




5  
Zip up to close the cover.

## Tower Instructions *Note: The push buttons on the Tower and Arch footplates must face backwards.*




1  
Repeat Steps 1-2 in general instructions.



2  
Screw on the stabilizing tubes to connect the two sides of the frame together.



3  
Put on your fabric gloves, then slide the graphics over the frame. Zip up halfway.




4  
Connect the frame to its corresponding foot plates by screwing through holes in the fabric and securing with nuts. Finish zipping up the fabric.




5  
Screw on clamps to the tower through holes in the fabric and then snap the arch into place.

## Case-2-Counter



1  
Insert all four poles into the bottom case lid.



2  
Connect the crossbars to the four poles by snapping them together.



3  
Then, insert the top case into the four poles.



4  
Pull the printed graphic over the frame. Then, buckle the two straps on the top & bottom.



5  
Place top lid to cover the storage area and you're all set.

## Light



1  
Attach metal clamp on top of wall/banner and tighten. Then, slide light onto clamp.



2  
Ensure the light is switched off before attaching cord and plugging into outlet.

## TV Mount *\*Max TV weight: 50 lbs. Max TV size: 42"*



1  
Locate the fabric holes and screw in the TV mount.




2  
Screw mount base into the arch frame. Then, screw the mount arms onto the back of your TV.



3  
Secure your TV to the mount by hooking the arms onto mount, and tightening screws.

# Quick-N-Fit Booth 1202

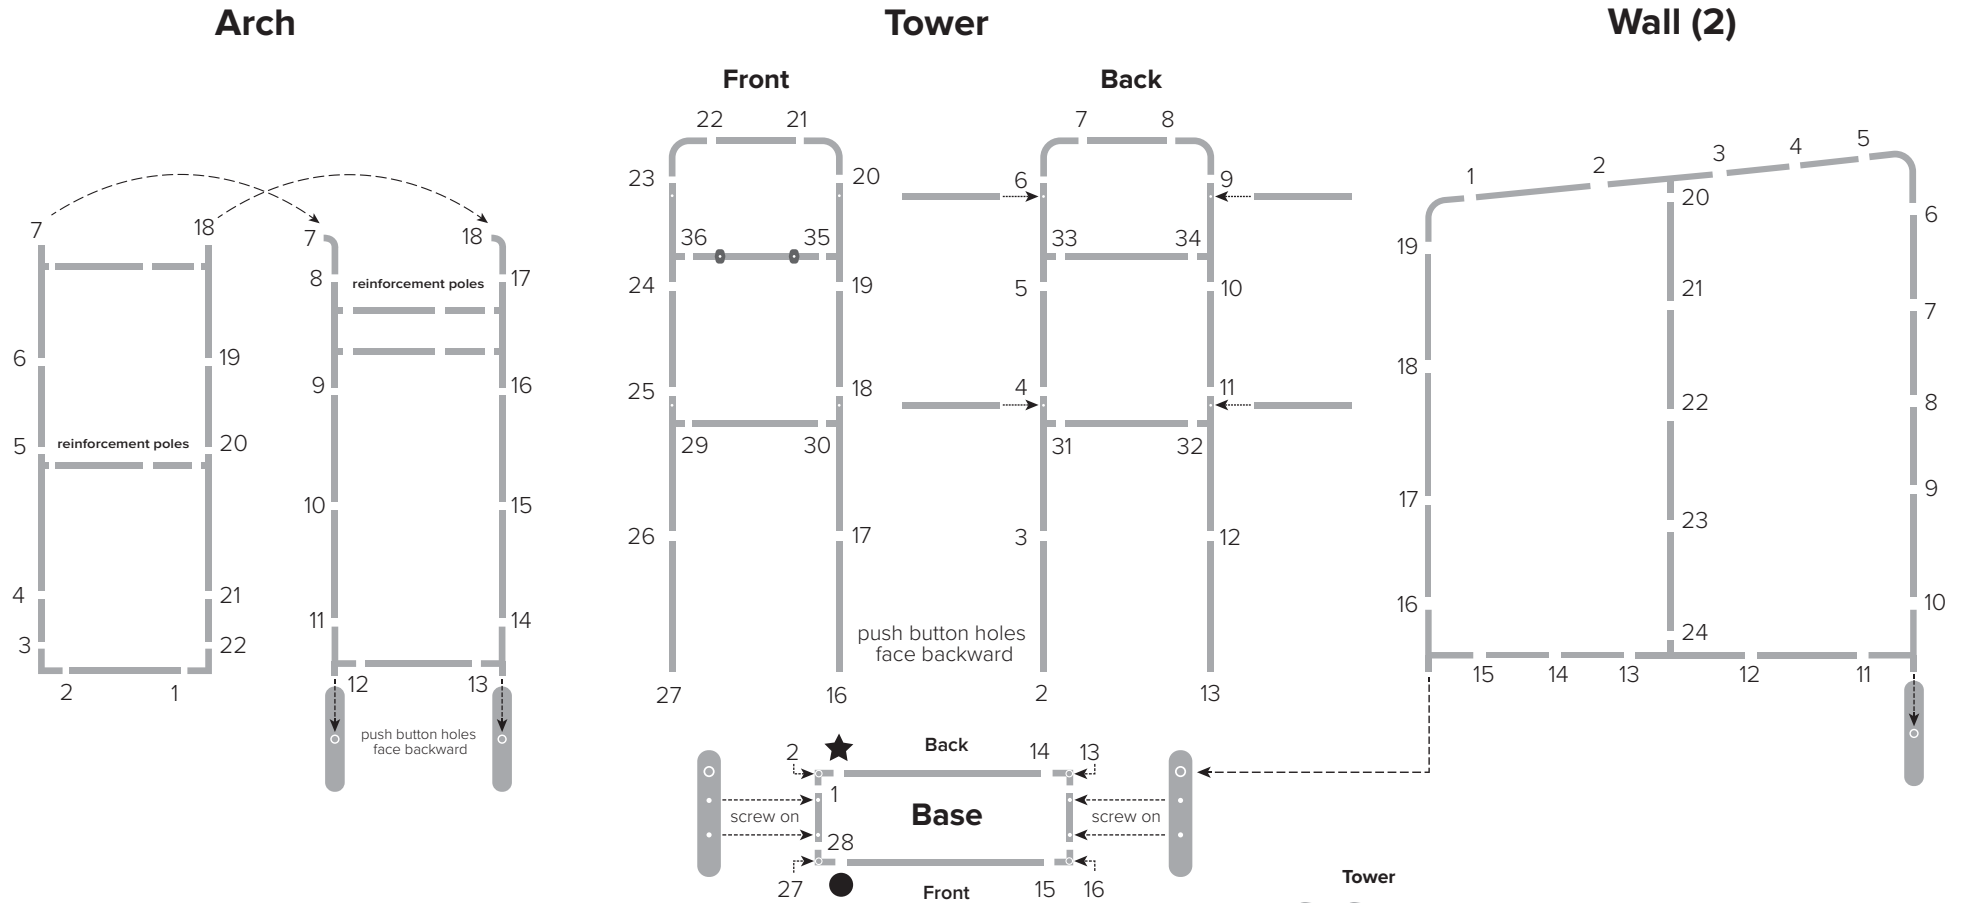

## Includes:

- 2 Walls
- 1 Tower
- 1 Arch
- 2 Case-2-Counters
- 1 TV Mount
- 2 Lights

*\*TV & Flooring Not Included*

